


M-Series

M Series is an ideal choice for central cooling of any premises where higher duct lengths are required to suit the site requirements.

These machines are manufactured using state of the art machines using high grade galvanised steel sheets duly powder coated to provide long life. The fans used are AMCA certified to provide error free output while cooling the air through most efficient cellulose pads.

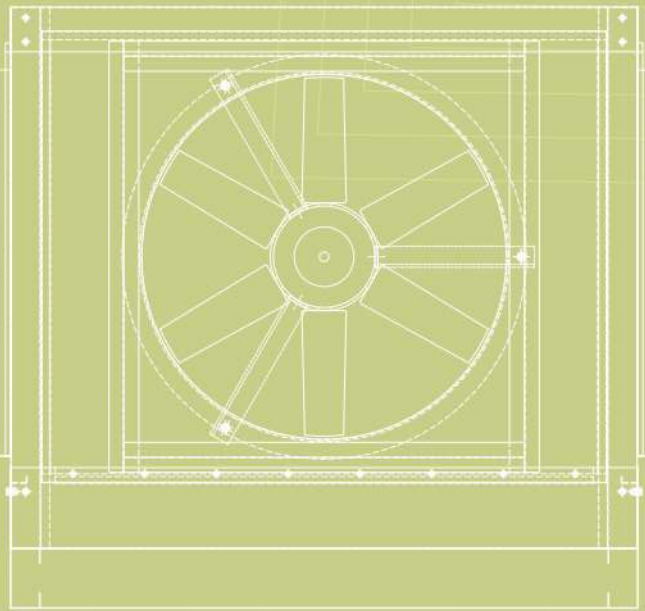

Convenient
Solution for
Customized
Spaces

MODEL NO	AIR FLOW CAPACITY		STATIC PRESSURE (mmwg) TSP	BLOWER MOTOR KW	PUMP WATT	PHASE	TANK CAPACITY (liters)	UNIT DIMENSIONS (mm)			WEIGHT Kg	#PEAK WATER CONSUMPTION LPH
	CMH	CFM						L	W	H		
GC-M-07M-T-C	6800	4000	30	1.5	35	1/3Ph	50	1050	1050	1000	200	48
GC-M-07M-S-C	6800	4000	30	1.5	35	1/3Ph	50	1050	1050	1000	200	48
GC-M-18M-T-A	18000	10000	18	1.1	35	1/3Ph	50	1050	1050	970	150	120
GC-M-18M-S-A	18000	10000	18	1.1	35	1/3Ph	50	1050	1050	970	150	120
GC-M-10F-T-C	10000	6000	30	2.2	35*	3Ph	80	1300	1500	1250	250	72
GC-M-10F-S-C	10000	6000	30	2.2	35*	3Ph	80	1300	1500	1250	250	72
GC-M-17F-T-C	17000	10000	38	3.7	120	3Ph	200	1750	1800	1550	350	120
GC-M-17F-S-C	17000	10000	38	3.7	120	3Ph	200	1600	1800	1550	350	120
GC-M-25F-T-C	25500	15000	38	5.5	180	3Ph	285	2050	2200	1850	500	180
GC-M-25F-S-C	25500	15000	38	5.5	180	3Ph	285	1850	2200	1850	500	180
GC-M-42F-T-C	42500	25000	38	9.3	250	3Ph	400	2500	2600	2400	800	300
GC-M-42F-S-C	42500	25000	38	9.3	250	3Ph	400	2250	2600	2400	800	300
GC-M-68F-T-C	68000	40000	40	15	370	3Ph	600	3000	3200	2700	1350	480
GC-M-68F-S-C	68000	40000	40	15	370	3Ph	600	2700	3200	2700	1350	480

